


ROLL-OR-KARI WEB LOCK AND TIGHTENER

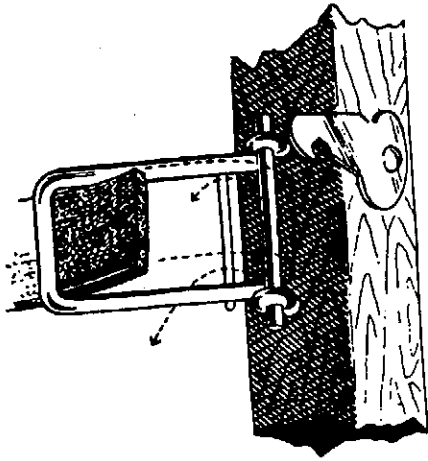

THREADING DIRECTIONS

Follow Closely Until Familiar
With Threading

Figure 1

Hold Locking Device in Extreme
Outward Position

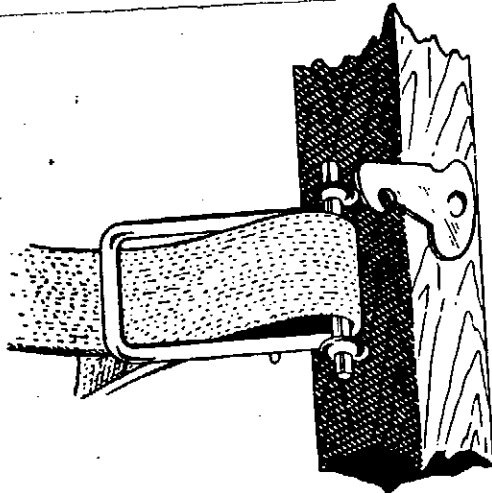


Figure 2

Strap is Threaded Through
Large Opening Around Hinge
Post. Pull End Through Until
in Approximate Adjustment

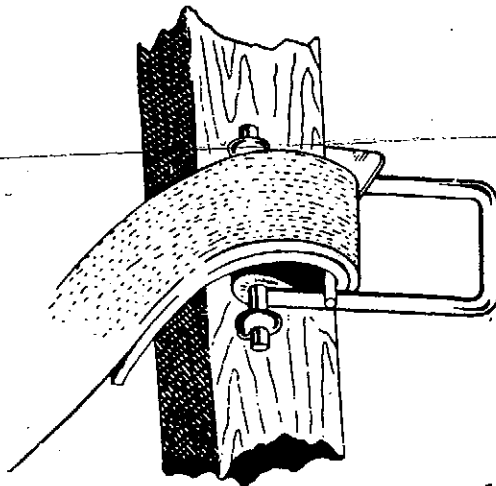


Figure 3

Swing Locking Device to Lock-
ing Position. Note: End of
Strap is Inside of Tightened
Strap if Correctly Threaded.

CAUTION

Do Not Raise Load Until Straps
Are Tightened

FOR LONGER LIFE OF TRUCKS
KEEP NUTS AND BOLTS TIGHTENED

ROLL-OR-KARI COMPANY

MANUFACTURERS

MINNESOTA

ZUMBROTA