


America's Leading Provider of Inflatable FUN!



**Basic Bounce Ride
Owner's & Safety Manual**

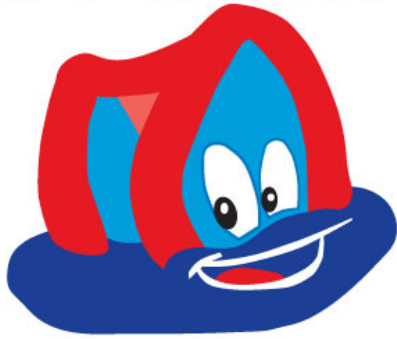

Length	Width	Height	Weight
13-15 Feet	13-15 Feet	15-22 Feet	Approx 250-300 lbs

Operating Requirements:(1) 1 to 1.5 HP Blower Motor with minimum 740 CFM Rating
(2) 1 Trained Operator

Maximum Number of Participants: Under 2-8 Years of Age – 8 Riders
9 – 13 Years of Age – 6 Riders
13 – 18 Years of Age – 4 Riders
Adults – 3 Riders

Maximum weight of participants: up to 250 pounds

Special Considerations: Overhead hazards

*** **NOTE** – The minimum length stake we recommend is 24 inches

*** **NOTE** – Blowers are self regulating. Once static pressure has been reached, the blower will back feed out of the blowers intake. This prevents overpressurization.

Detailed Game Instructions
Follow All Standard Game Guidelines

When operating the Basic Bounce Unit, the persons operating and attending the unit must be aware that these pieces have multiple play areas. Attendants must insure that the slide area is clear before allowing the next participant to go down the slide. All

Combo Units that have slide portions include foam steps up to the inflated stairway to ensure the safety and ease of climb for all participants.

Setup

The inflatable unit must have a six feet perimeter surrounding the unit when inflated. So when placing the unit for setup, make sure there is ample space when inflated.

The Basic Bounce Unit has multiple tie down straps located in each corner of the ride. During setup and operation all tie downs should be anchored into the ground or on hard surfaces weighted down with sandbags. Each sandbag (at 40 lbs. per bag) per tie down is sufficient to anchor this inflatable.

For basic upkeep and safety, a visual inspection of the inflatable should take place after each use. All inflatables should not be stored at temperatures below 0 degrees Fahrenheit or above 110 degrees Fahrenheit.

Operation

The Basic Bounce Unit must be fully inflated and secured to the ground before allowing any participants to enter the play area. An attendant should be present at the entrance of the inflatable at all times during operation. The attendant is required to insure all safety precautions are being followed.

*** Safety Rules ***

Do not operate this unit in winds that are in excess of 20 MPH.

Do not inflate or use the piece of equipment without first securing it to the ground or stationary devices using all tethered connections as described above.

Do not pound any stakes into the ground without verifying that gas and electrical line locations with your local utility company.

Do not operate this unit in inclement weather.

Do not allow more participants into the play area than is described above.

No Jewelry	No Diving
No Sharp Objects	No Rough Play
No Glasses	No Wrestling
No Shoes	No Flipping
No Pushing	No Shoving

Remember have fun, but be safe!

OPERATORS MUST BE ON DUTY AT ALL TIMES!!!

Compliance Statement

The vinyl used in the construction of this product is of the highest quality, and adheres to MFR Methods: ASTM 6413-99, NFPA 701 (1999) and FTMS 191A Method 5903.

Space Walk Interactive, LLC 450 31st Street Kenner, LA 70065

Phone: (504) 464-6026 Fax: (504) 464-5851

www.herecomesfun.com